



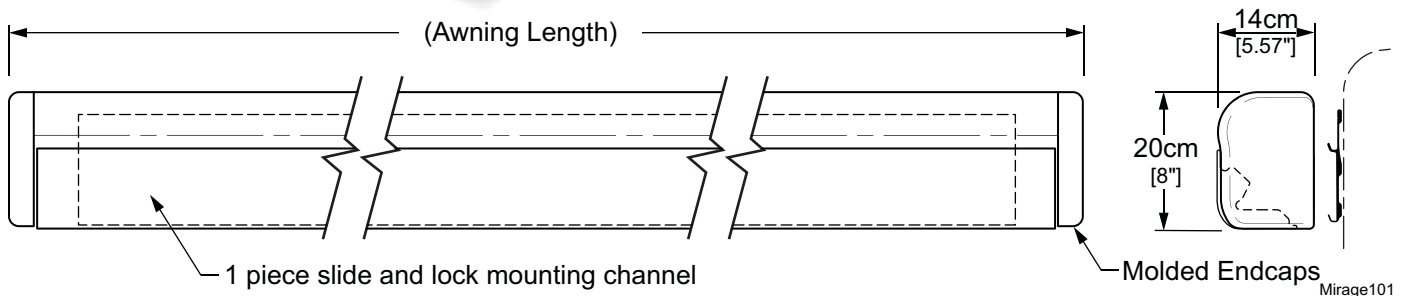

**MIRAGE**

**Motorized Lateral Arm Box Awning**

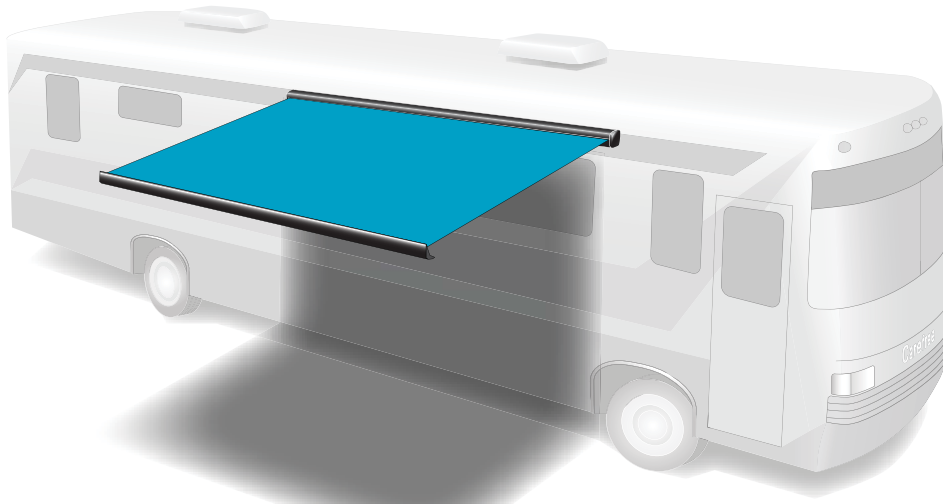

- *Self contained, no need for additional awning rails or other attachments;*
- *No vertical arms to interfere with the side walls, windows or other accessories, the awning can be positioned without concern of obstructions;*
- *Lateral arm design support, the strongest lateral arms available in the market;*
- *No separate ground supports are required.*
- *Pitch adjustment can be set for optimal rain run-off;*
- *Direct Response Auto-Retract system, the latest in electronic controls with automatic retract, sensitivity control and no anemometer cups. The system includes a 433MHz RF remote;*
- *Key pad design provides a positive tactile feel and total control in one master panel including Standard Operation and the Direct Response sensitivity settings.*

**SPECIFICATIONS**



<b>LENGTH</b>	4.27m [14'] – 6.7m [22'] in 1' [.3m] increments		
<b>EXTENSION:</b>	3m [10']	<b>DROP:</b>	30.5cm [12"] @ Minimum Pitch; 91.4cm [36"] @ Maximum Pitch
	<i>Values are approximate, actual dimensions may vary with specific installations.</i>		
<b>SUPPORT:</b>	Lateral Spring Arms 2 up to 5.5m [18']; 3 for 5.8m [19'] and longer		
<b>MOTOR:</b>	Tubular	Available in LH or RH configurations	
	<i>Power:</i>	230V, 50Hz	<i>Torque:</i> 60nm <i>Speed:</i> 14 RPM
<b>CONTROLS:</b>	Direct Response with a single master control and single remote for all awnings.		
<b>COLOR:</b>	<i>Hardware:</i>	White or Black	
	<i>Fabric:</i>	Woven Acrylic (refer to sales literature for colors)	

**DIRECT RESPONSE ELECTRONIC CONTROLS**


The *Direct Response* Auto-Retract system detects awning motion caused by windy conditions. The motion sensor is located in the lead rail. Sensitivity is set on the control panel. The system operates by gauging the vertical motion of the awning’s leading edge. When persistent motion exceeds the factory preset threshold value for 2 seconds or longer, the system will automatically retract the awning. Gust detection is incorporated into the software. When the motion value is suddenly and sharply increased above a safe maximum value, then the 2 second persistence measure is overridden and the awning closes immediately.

The Direct Response system provides a wide range of awning controls with control panel operation in one convenient location. The standard operation is straight-forward with the buttons clearly labeled.

The auto-retract system is active when the awning system is powered. The system is off when the power is shut off.

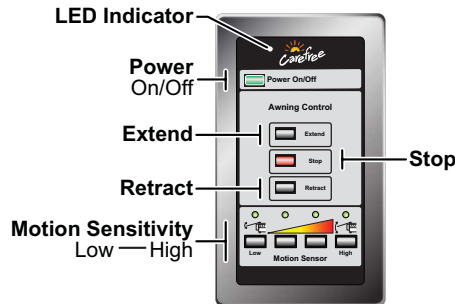

RTA045



RTA039c

The Direct Response system measures the motion of the lead rail during adverse conditions such as wind. 4 factory preset values are provided.

**HIGH** - The higher the selection, more motion is required before the system closes automatically.

**LOW** - The lower the selection, less motion is required before the system closes automatically.

**WARRANTY**

The Mirage Patio Awning is covered by the standard Carefree of Colorado 1 year Limited Warranty.

**ON-LINE AT WWW.CAREFREEOFEUROPE.EU**

- ◆ Product Manuals
- ◆ Fabric Options
- ◆ Warranty Information